

SLX-RN-VA

VENTURI RINSE & AIRLESS FOAM




The Venturi Airless Foamer with Rinse Station is a game-changing innovation designed to revolutionize your sanitation cleaning procedures. With its advanced features and all-in-one functionality, it simplifies and streamlines the entire cleaning process, providing unmatched efficiency and convenience.

This powerful system combines the exceptional foaming capabilities of the Venturi Airless Foamer with the added benefit of a dedicated rinse station. Effortlessly transition from foam application to rinsing in a single, seamless operation.

Stainless Steel



Polypropylene

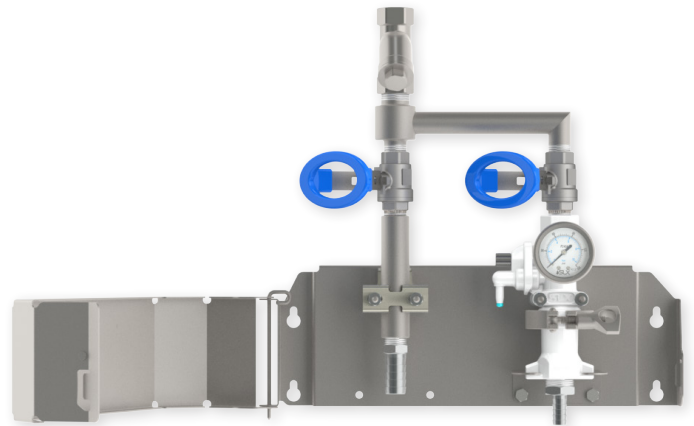

FEATURES:


- Patented split body design for easy servicing and maintenance
- Foaming and Rinsing in One: Seamlessly transition from foam application to rinsing with the integrated rinse station.
- Rich, dense foam using water and cleaning solution without the need for compressed air.
- Constructed with stainless steel and polypropylene materials.
- Tool free maintenance (even the check valves and plumbing components)
- Lockable stainless-steel cover and mounting bracket

Dimensions	16" x 14.75" x 6"
Flow Rate*	Foamer: 1.4 GPM Rinse: 7.2 GPM
Max Temperature	140°F
Water Pressure	35-125 PSI

*Flow rate measured at 40 PSI, will vary depending on insert size.

INCLUDES:

- Foamer with polypropylene or stainless steel body
- PVC venturi insert
- Stainless Steel Rinse station
- Stainless steel mounting bracket and lockable cover
- Color coded metering tips
- 6' suction line with strainer and ceramic weight
- 50' blue and white discharge hoses (*other colors also available*)
- Polypropylene foam and rinse spray wands

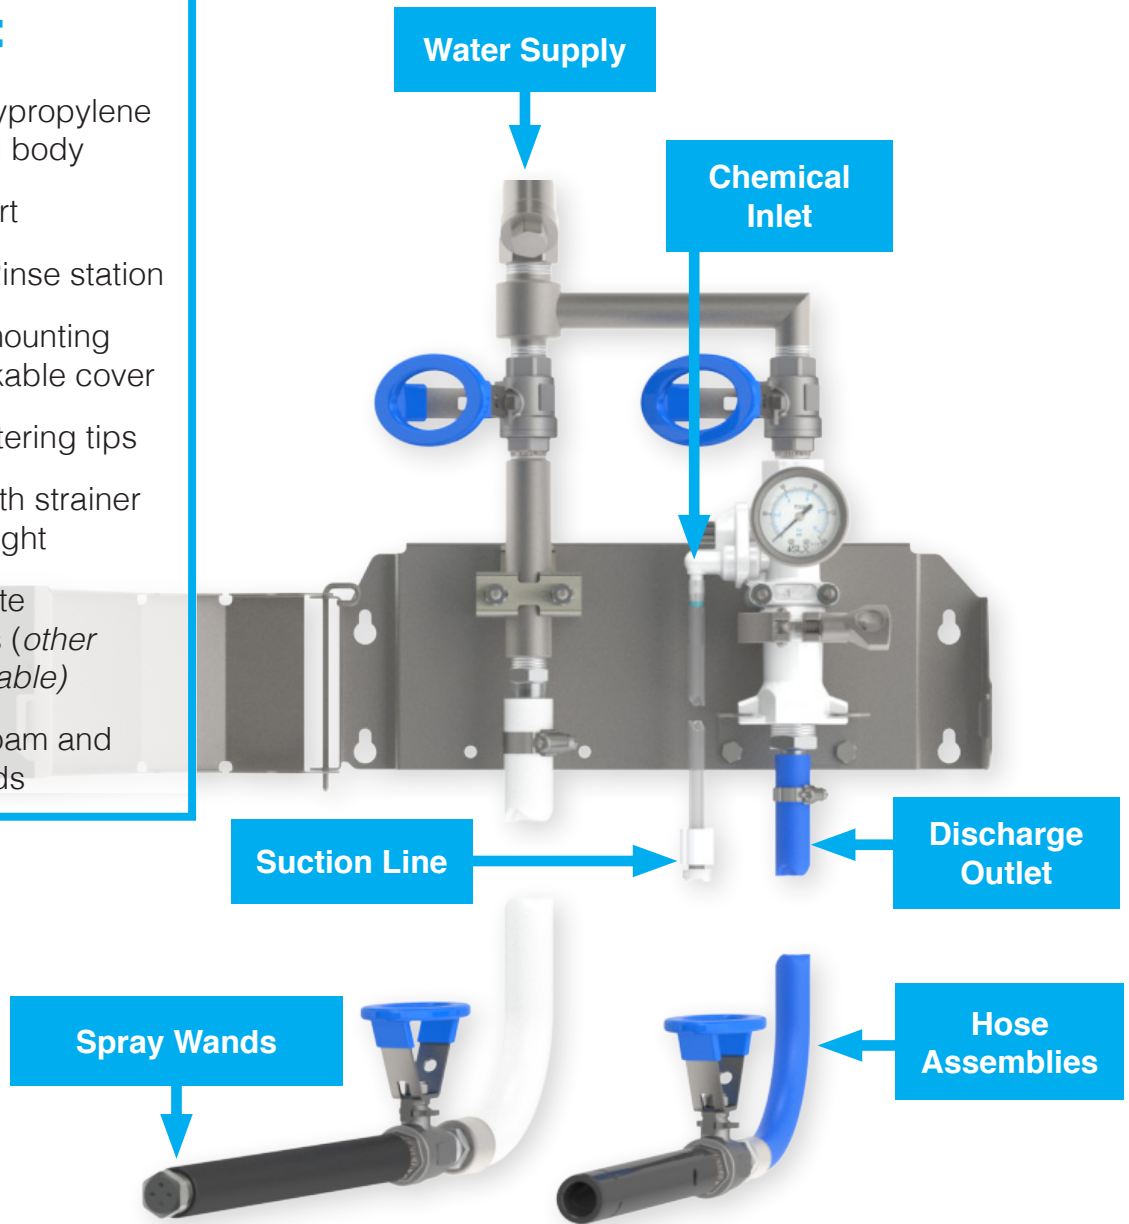

Polypropylene body shown

SPECIFICATIONS

Part Number	Foamer Water Flow Rate (GPM @ 40 PSI)	Foamer Dilution Ratios	Rinse Water Flow Rate (GPM @ 40 PSI)	Body Material
SLX-MS2-RN-VA14P	1.4	306:1 to 5:1	7.2	Polypropylene
SLX-MS2-RN-VA14S	1.4	306:1 to 5:1	7.2	Stainless Steel