

# SLX-VS-VA



## VENTURI SANITIZE & AIRLESS FOAM

The SLX Venturi Airless Foamer with Sanitizer Spray Station is a cutting-edge cleaning system designed to revolutionize your sanitation procedures. With its advanced features and all-in-one functionality, it offers a comprehensive solution for achieving optimal cleanliness and hygiene.

This powerful system combines the exceptional foaming capabilities of the Venturi Airless Foamer with the added benefit of a dedicated sanitizer spray station. It takes your cleaning operations to the next level by seamlessly integrating foam application and sanitization into a single, decentralized hose drop station.

### Stainless Steel




### Polypropylene



## FEATURES:

- Patented split body design for easy servicing and maintenance
- Foaming and Sanitizing in One: Seamlessly transition from foam application to sanitation with the integrated sanitizer spray station.
- Rich, dense foam using water and cleaning solution without the need for compressed air.
- Constructed with stainless steel and polypropylene materials.
- Tool free maintenance (even the check valves and plumbing components)
- Lockable stainless-steel cover and mounting bracket

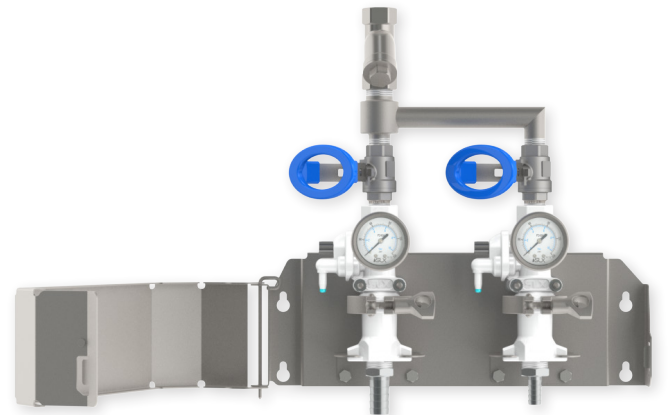


|                 |                                       |
|-----------------|---------------------------------------|
| Dimensions      | 16" x 14.75" x 6"                     |
| Flow Rate*      | Foamer: 1.4 GPM<br>Sanitizer: 5.4 GPM |
| Max Temperature | 140°F                                 |
| Water Pressure  | 35-125 PSI                            |

\*Flow rate measured at 40 PSI, will vary depending on insert size.

## INCLUDES:

- Foamer and Sanitizer with polypropylene or stainless steel bodies
- PVC venturi inserts
- Stainless steel mounting bracket and lockable cover
- Color coded metering tips
- 6' suction line with strainer and ceramic weight
- 50' blue and red discharge hoses (*other colors also available*)
- Polypropylene foam and sanitizer spray wands

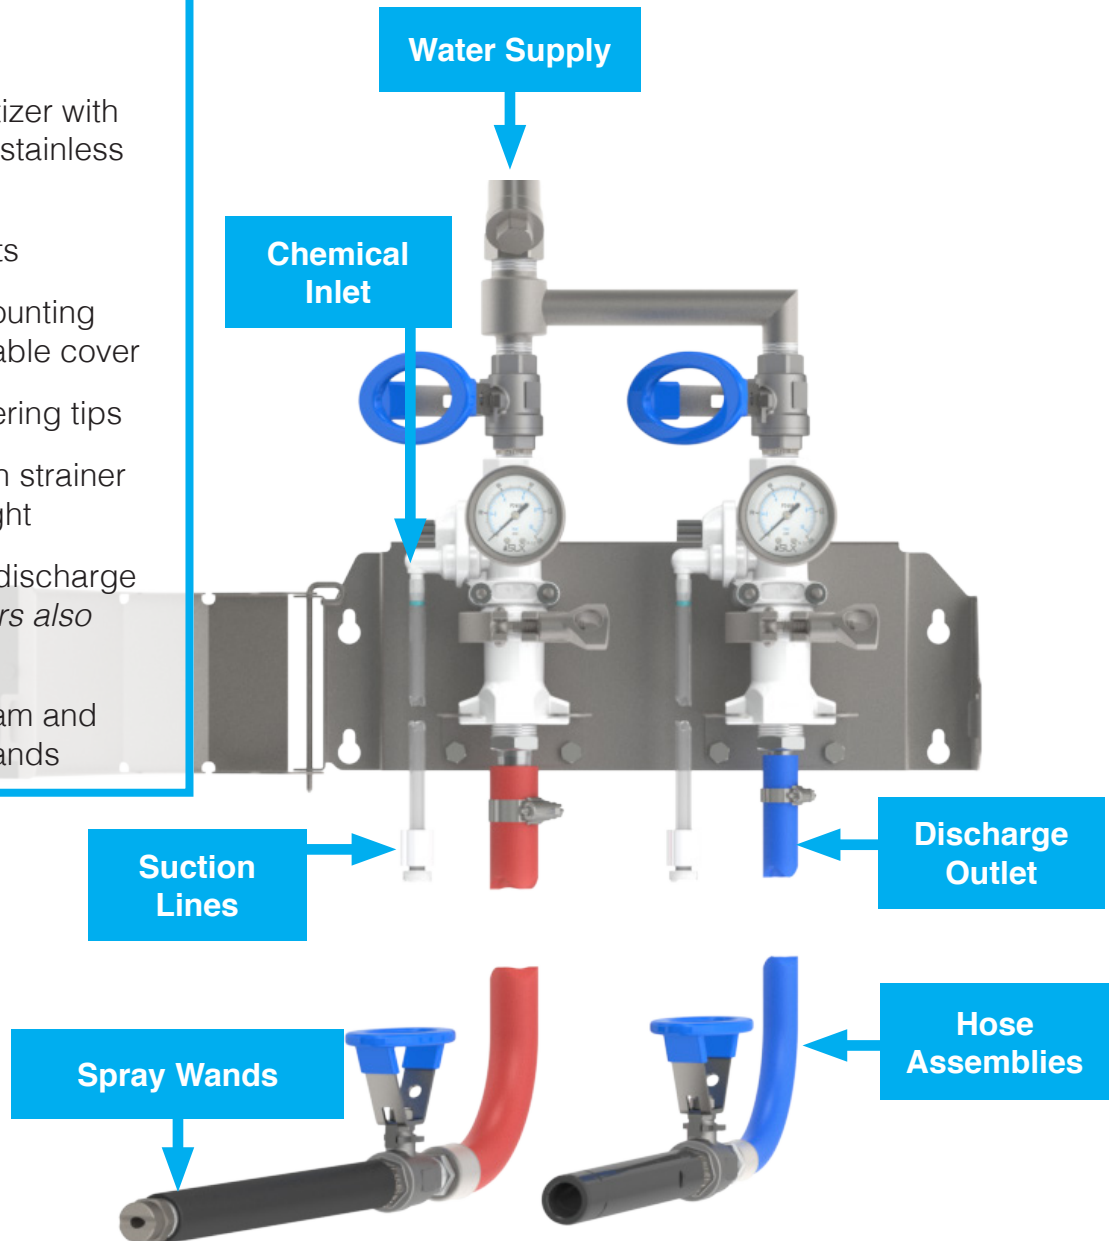

*Polypropylene body shown*

## SPECIFICATIONS

| Part Number         | Foamer Water Flow Rate (GPM @ 40 PSI) | Foamer Dilution Ratios | Sanitizer Water Flow Rate (GPM @ 40 PSI) | Sanitizer Dilution Ratios | Body Material   |
|---------------------|---------------------------------------|------------------------|--|---------------------------|-----------------|
| SLX-MS2-VS54P-VA14P | 1.4                                   | 306:1 to 5:1           | 5.4                                      | 1,234:1 to 11:1           | Polypropylene   |
| SLX-MS2-VS54S-VA14S | 1.4                                   | 306:1 to 5:1           | 5.4                                      | 1,234:1 to 11:1           | Stainless Steel |