

# SLX-BP-VS



## BOOSTED PRESSURE VENTURI SPRAYER


The SLX-BP-VS Venturi Sprayer is a medium volume sanitizer applicator for applying chemical cleaning or sanitizing solutions to a variety of surfaces and/or equipment.

The body construction is made of stainless steel with a built-in venturi injector that uses boosted water pressure (125 - 350 PSI) to extract and dilute chemical concentrate into the water stream to create an accurately mixed solution. Spray is controlled and dispensed via a pull lever operated spray handle.



## FEATURES:


- Split body design for easy servicing and maintenance (patent pending)
- Boosted pressure produces excellent spray quality using less water
- Tool free maintenance (even the check valves and plumbing components)
- Spray nozzle with pull lever handle
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Large stainless steel ball valve at inlet with 1/2" NPT connection

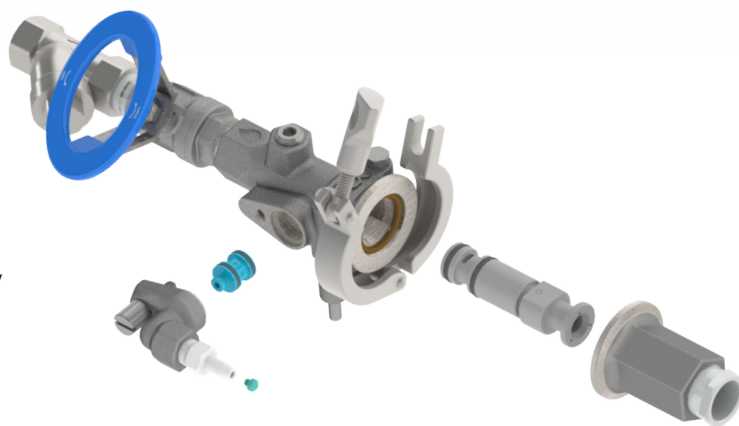

Dimensions	8-1/4" x 15" x 6"
Flow Rate at 250 PSI	5.6 GPM
Max Temperature	140°F
Water Pressure	125 - 350 PSI

**INCLUDES:**

- Sprayer with stainless steel body
- PVC venturi insert
- Stainless steel mounting bracket and lockable cover
- Color coded metering tips
- 6' suction line with strainer and ceramic weight
- 50' blue discharge hose
- Spray nozzle with pull lever handle

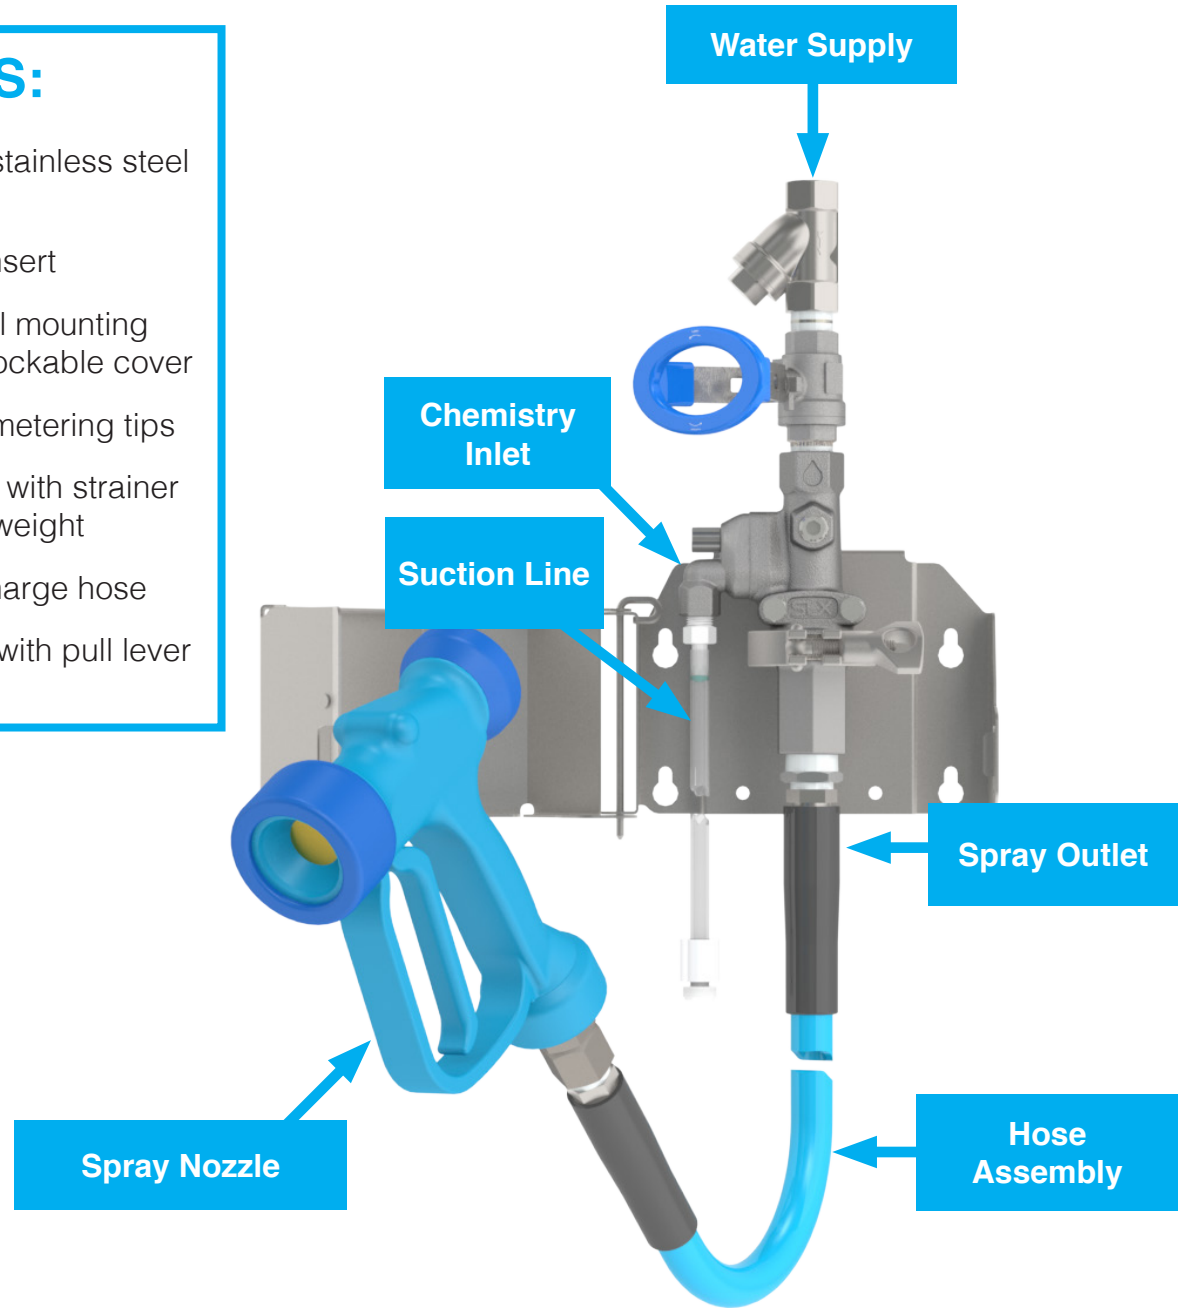

**SPECIFICATIONS**

Insert #	Water Flow Rate (@ 250 PSI)	Hose Size	Dilution Ratios
BP-V56	5.6 GPM	1/2" x 50'	1,307:1 - 6:1

**PART NUMBER ARCHITECTURE**

**SLX-BP-VF** [insert size] [body material] - [option]

56

S = Stainless Steel

**Blank** = 1 chemical inlet  
**2** = 2 chemical inlets

ex) **SLX-BP-VS56S:**  
 5.6 GPM Venturi Foamer with stainless steel body, and 1 chemical inlet.