

SLX-VD-VD-VD



SLX DISPENSING MULTI-STATION



The SLX Dispensing Station is a 10.7 GPM three-station chemical proportioner for precisely measuring and diluting chemical concentrate using three separate stations. These systems are ideal for filling jugs and other containers quickly with blended recipes using a ball valve or trigger gun.

This high volume decentralized mixing station works with city water pressure to dilute three isolated chemistries at a range of dilution ratios to get you accurately measured, ready to use cleaning solution.

Polypropylene

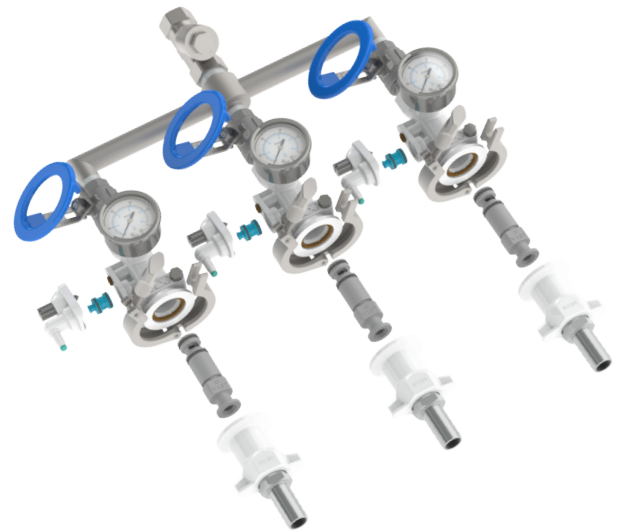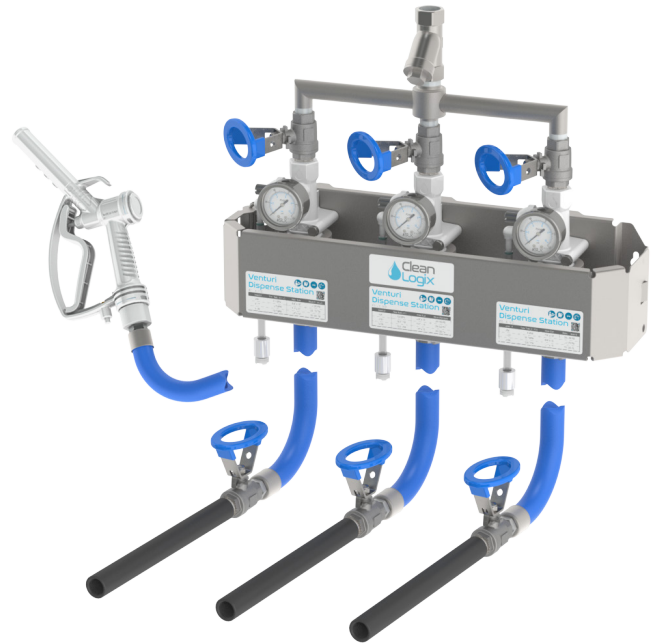

FEATURES:


- More efficient and accurate than manual mixing
- Split body design for easy servicing and maintenance (patent pending)
- Tool free disassembly
- Modular components to alter dilution ratios
- Ball valve or trigger wand for controlled dispensing
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Large stainless steel ball valves at inlets for hands free dispensing.

Dimensions	15" x 19-1/2" x 6"
Flow Rate	10.7 GPM
Max Temperature	160°F
Water Pressure	35-125 PSI
Max Dilution*	27:1

*Dilution range will vary depending on insert and hose size.

INCLUDES:

- Stations with polypropylene body
- PVC venturi inserts
- Stainless steel mounting bracket and lockable cover
- Color coded metering tips
- 1/4" OD suction lines with strainers and ceramic weights
- Water pressure gauges
- 15' blue discharge hoses
- Polypropylene wands with ball valves
 - *Trigger gun upgrades available*

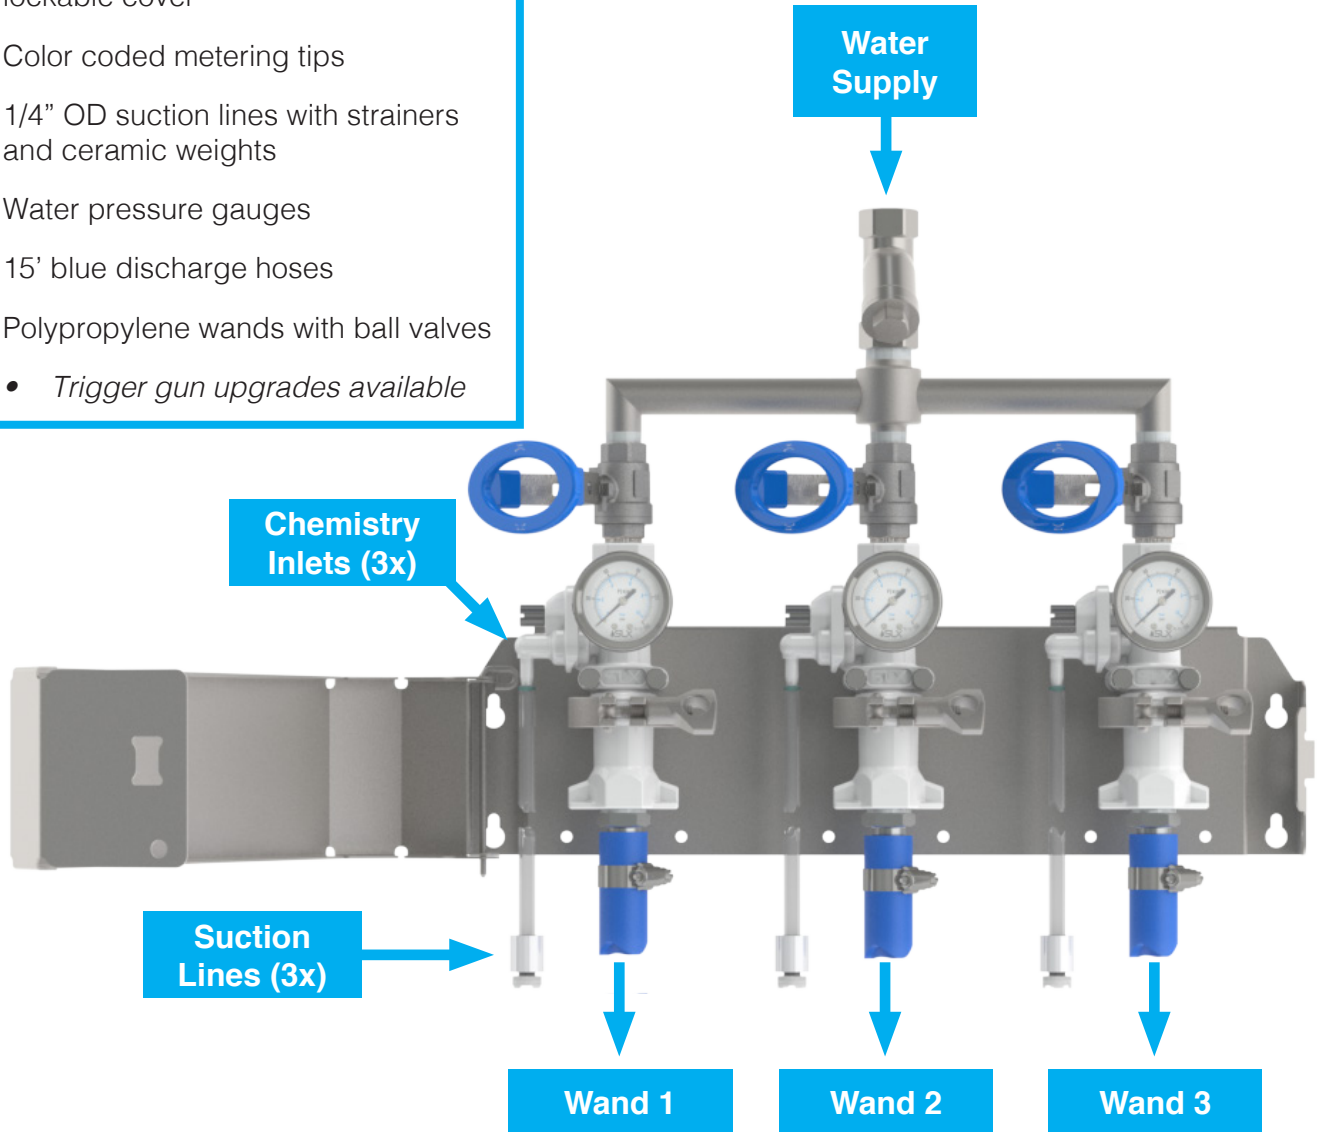

SPECIFICATIONS

Part Number	Water Flow Rate (GPM)	Hose Size	Dilution Range (@ 40 PSI)
SLX-MS3-VD107P-VD107P-VD107P	10.7	3/4" x 15'	3069:1 - 27:1