

SLX-MS





PUMP FED FOAM, FOAM, SANITIZE

The SLX Double Foam and Sanitation multi-station is an all-in-one set up for cleaning **and** sanitizing industrial processing equipment using ready to use (RTU) cleaning solutions (35-125 PSI) from one location with separate discharge hoses.

This low to medium volume centralized cleaning and sanitation system uses a pump to supply cleaning solutions and sanitizers, independently, to foam and sanitizer proportioners. All three systems (both foamers and sanitation sprayers) are securely mounted onto a stainless-steel wall bracket for easy installation.

Polypropylene

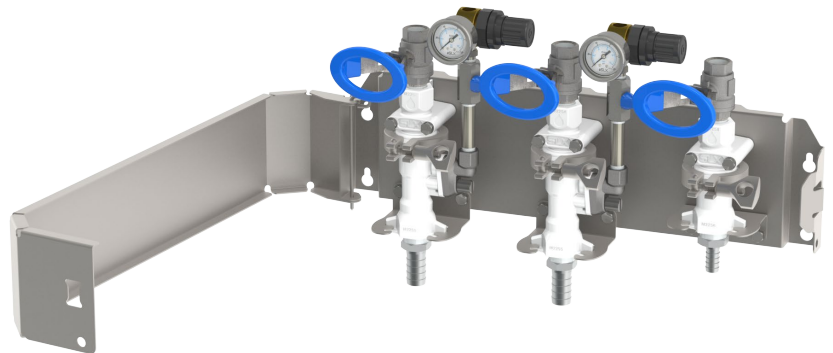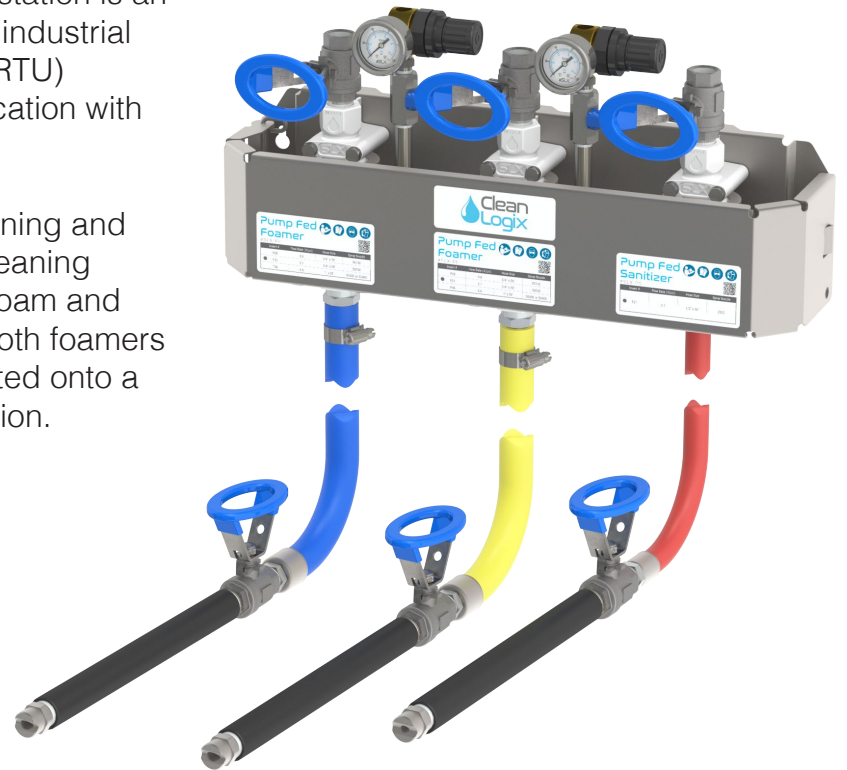

FEATURES:


- Split body design for easy servicing and maintenance (patent pending)
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Adjustable consistency (dry vs. wet foam)
- Tool free disassembly (even the check valves and plumbing components)
- Large fan nozzle for efficient spray coverage
- Includes pressure gauges for air
- Large stainless steel ball valves at inlet and outlet with 1/2" NPT connections

Dimensions	20-1/4" x 11-5/8" x 6"
Max Temperature	160°F
Pump Pressure	35-125 PSI
Air Pressure*	40 PSI (up to 5 CFM)

*Air pressure recommended 40PSI, adjust for foam quality.

INCLUDES:

- Polypropylene Pump Fed Foamer with 3/4" x 50' blue hose
- Polypropylene Pump Fed Sanitizer with 3/4" x 50' red hose
- Polypropylene Pump Fed Sanitizer with 1/2" x 50' yellow hose
- 10" polypropylene spray wands (3x)
 - Stainless upgrade available
- Stainless steel mounting bracket and cover

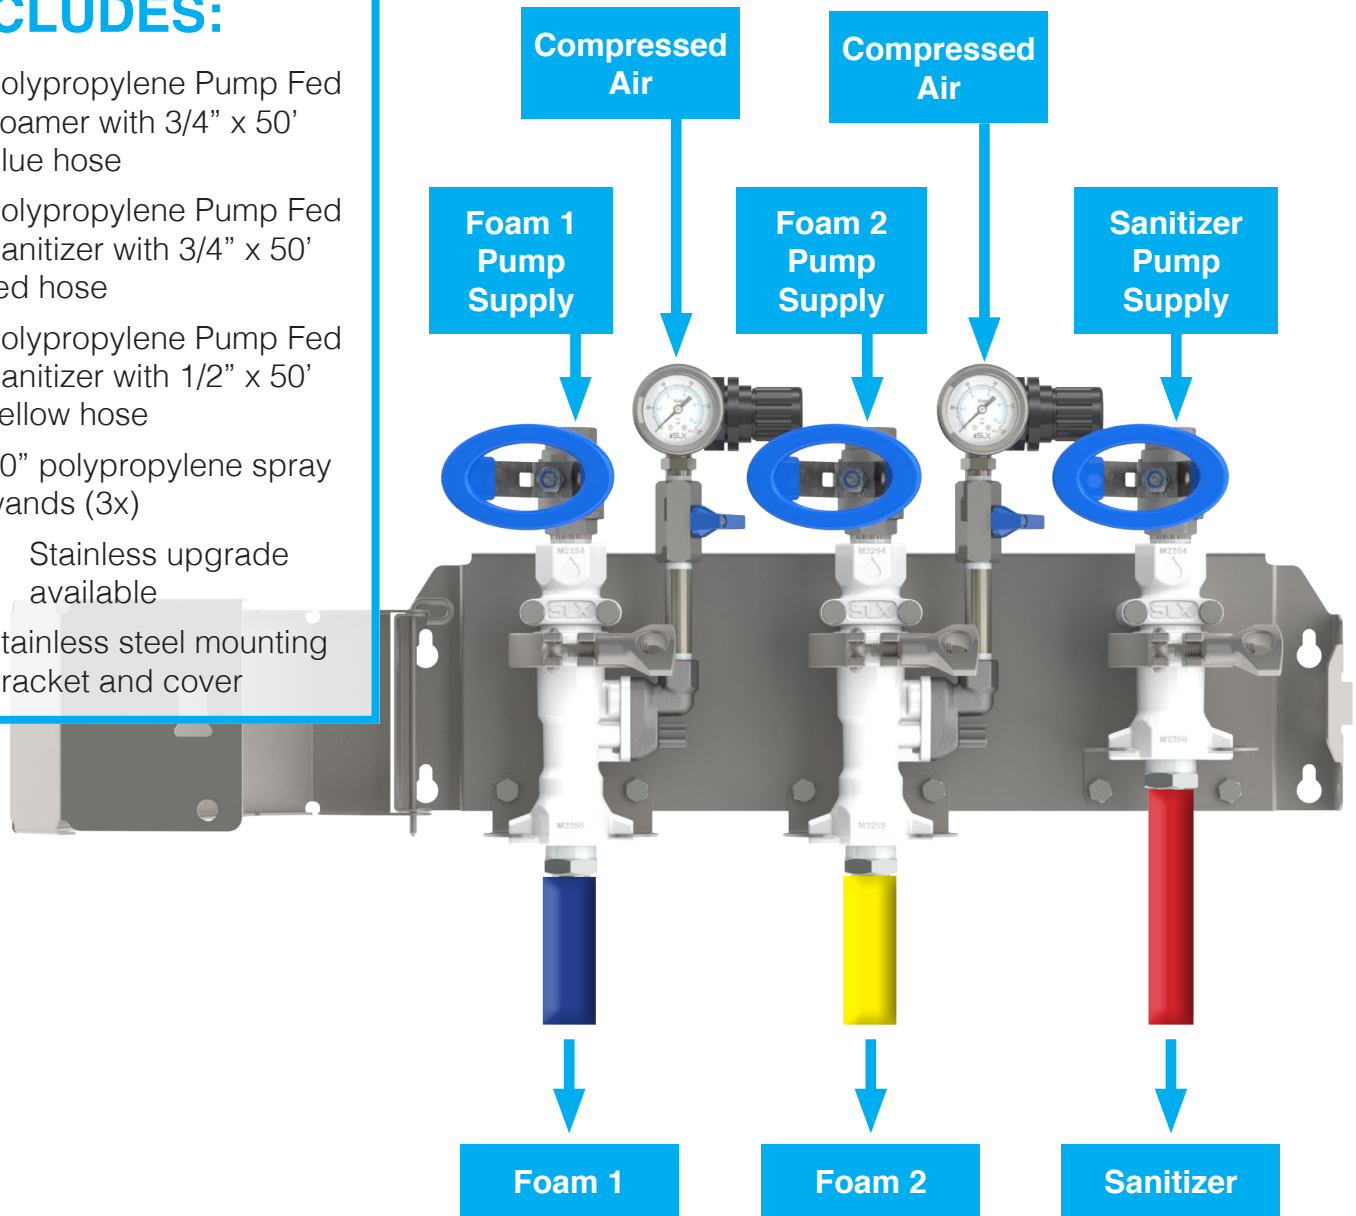

SPECIFICATIONS

Part #	Foam Coverage Time (sq/ft per min)	Foamer Flow Rate (GPM)	Foamer Water Flow Rate (GPM)	Sanitizer Flow Rate (GPM)	Sanitizer Water Flow Rate (GPM)
<u>SLX-MS3-PF21P-PF21P-PS21P</u>	250	10.5 - 21	2.1	10.5 - 21	2.1