

SLX-MS



PUMP FED SANITIZE & FOAM

The SLX Sanitize and Foam multi-station provides an all-in-one cleaning system to foam and sanitize industrial processing equipment using ready to use (RTU) cleaning solutions (35-125 PSI) from one hose drop location.

This low to medium volume centralized cleaning and sanitation system uses a pump supply ready to use, pre-diluted cleaning solutions to a stainless steel foam and sanitizer proportioner, each individually. Both the foamer and sanitizer system are securely mounted onto a stainless-steel wall bracket for easy installation.

Stainless Steel




Polypropylene



FEATURES:

- Split body design for easy servicing and maintenance (patent pending)
- Tool free disassembly (even the check valves and plumbing components)
- Large fan nozzle for efficient spray coverage
- Adjustable consistency (dry vs. wet foam)
- Modular components to alter flow rates
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Includes pressure gauges for air
- Large stainless steel ball valves at inlet and outlet with 1/2" NPT connection

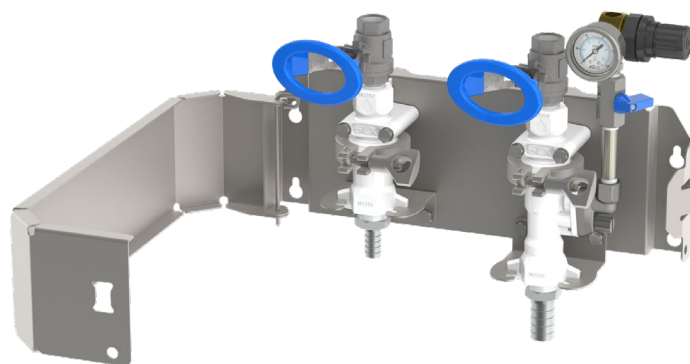


Dimensions	15" x 11-5/8" x 6"
Max Temperature	160°F
Pump Pressure	35-125 PSI
Air Pressure*	40 PSI (up to 5 CFM)

*Air pressure recommended 40PSI, adjust for foam quality.

INCLUDES:

- Stainless Steel or Polypropylene Pump Fed Sanitizer with 1/2" x 50' red hose
- Stainless Steel or Polypropylene Pump Fed Foamer with 3/4" x 50' blue hose
- 10" polypropylene spray wands (2x)
 - Stainless upgrade available
- Stainless steel mounting bracket and cover

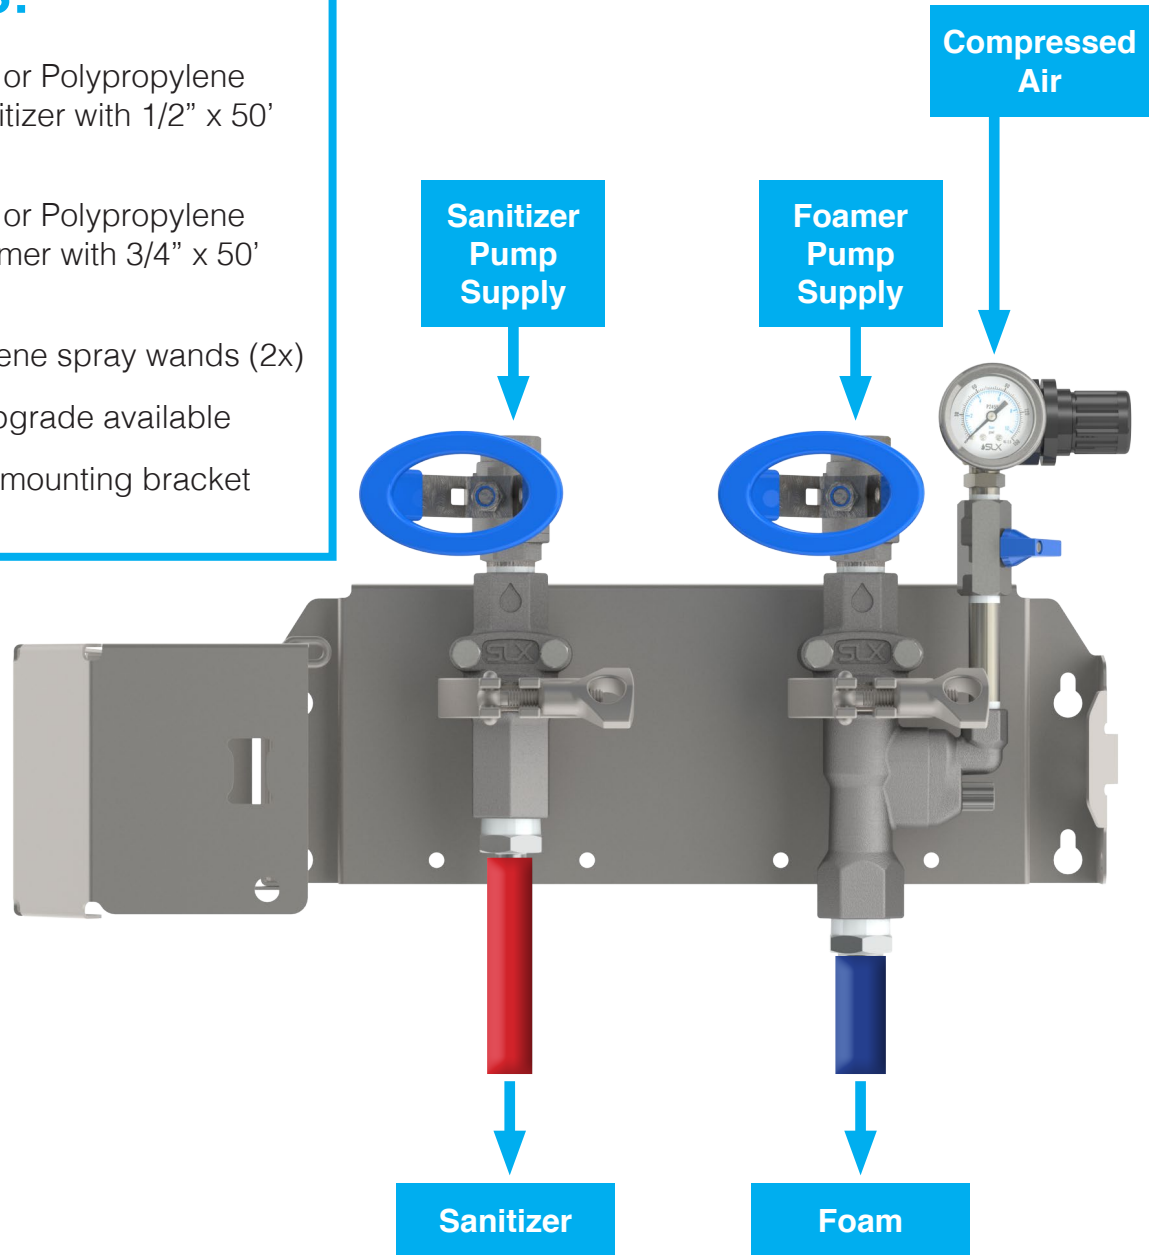

SPECIFICATIONS

Part #	Foam Coverage Time (sq/ft per min)	Foamer Flow Rate (GPM)	Foamer Water Flow Rate (GPM)	Sanitizer Flow Rate (GPM)	Sanitizer Water Flow Rate (GPM)	Body Material
SLX-MS2-PS21P-PF21P	250	10.5 - 21	2.1	10.5 - 21	2.1	Polypropylene
SLX-MS2-PS21S-PF21S	250	10.5 - 21	2.1	10.5 - 21	2.1	304 SS