

# SLX-MS



## VENTURI SANITIZE, RINSE, FOAM


The SLX Sanitize, Rinse & Foam multi-station is the most complete, all-in-one set up for cleaning and sanitizing industrial processing equipment using standard water pressure (35-125 PSI) from one location.

This low to medium volume decentralized sanitation system uses a water driven venturi effect to dilute concentrated cleaning solutions and sanitizers, independently, to foam and sanitizer proportioners. All three systems (sanitizer, rinse station and foamer) are all securely mounted onto a stainless-steel wall bracket for easy installation.

### Stainless Steel




### Polypropylene

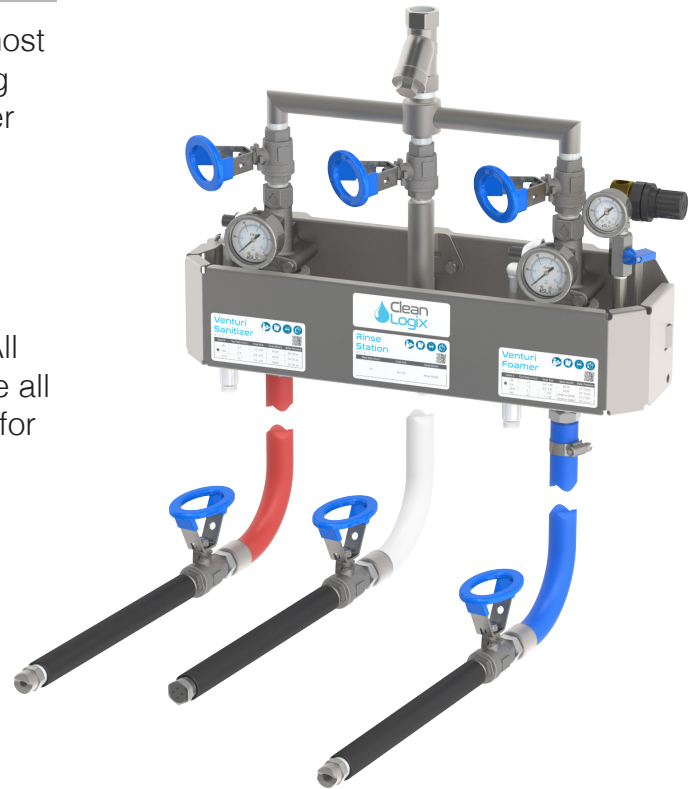

## FEATURES:

- Single water inlet
- Split body design for easy servicing and maintenance (patent pending)
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Tool free disassembly (even the check valves and plumbing components)
- Large fan nozzle for efficient spray coverage
- Includes pressure gauges for air/water
- Large stainless steel ball valves at inlet and outlet with single 3/4" NPT connection for water

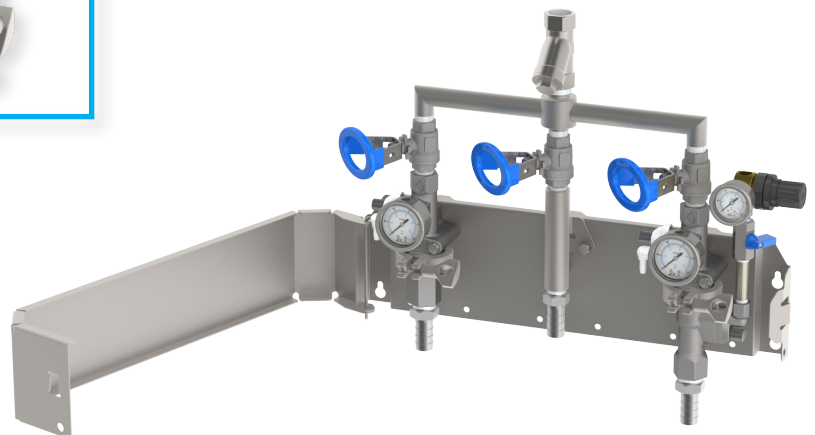


Dimensions	20-1/4" x 17-3/8" x 6"
Max Temperature	160°F
Water Pressure	35-125 PSI
Air Pressure*	40 PSI (up to 5 CFM)

\*Air pressure recommended 40PSI, adjust for foam quality.

## INCLUDES:

- Stainless Steel or Polypropylene Venturi Sanitizer with 3/4" x 50' red hose
- Stainless Steel Rinse station with 3/4" x 50' white hose
- Stainless Steel or Polypropylene Venturi Foamer with 3/4" x 50' blue hose
- 10" polypropylene spray wands (3x)
  - Stainless upgrade available
- Stainless steel mounting bracket and cover
- Color coded metering tips (2x)
- 6' suction line with mesh screen and ceramic weight (2x)

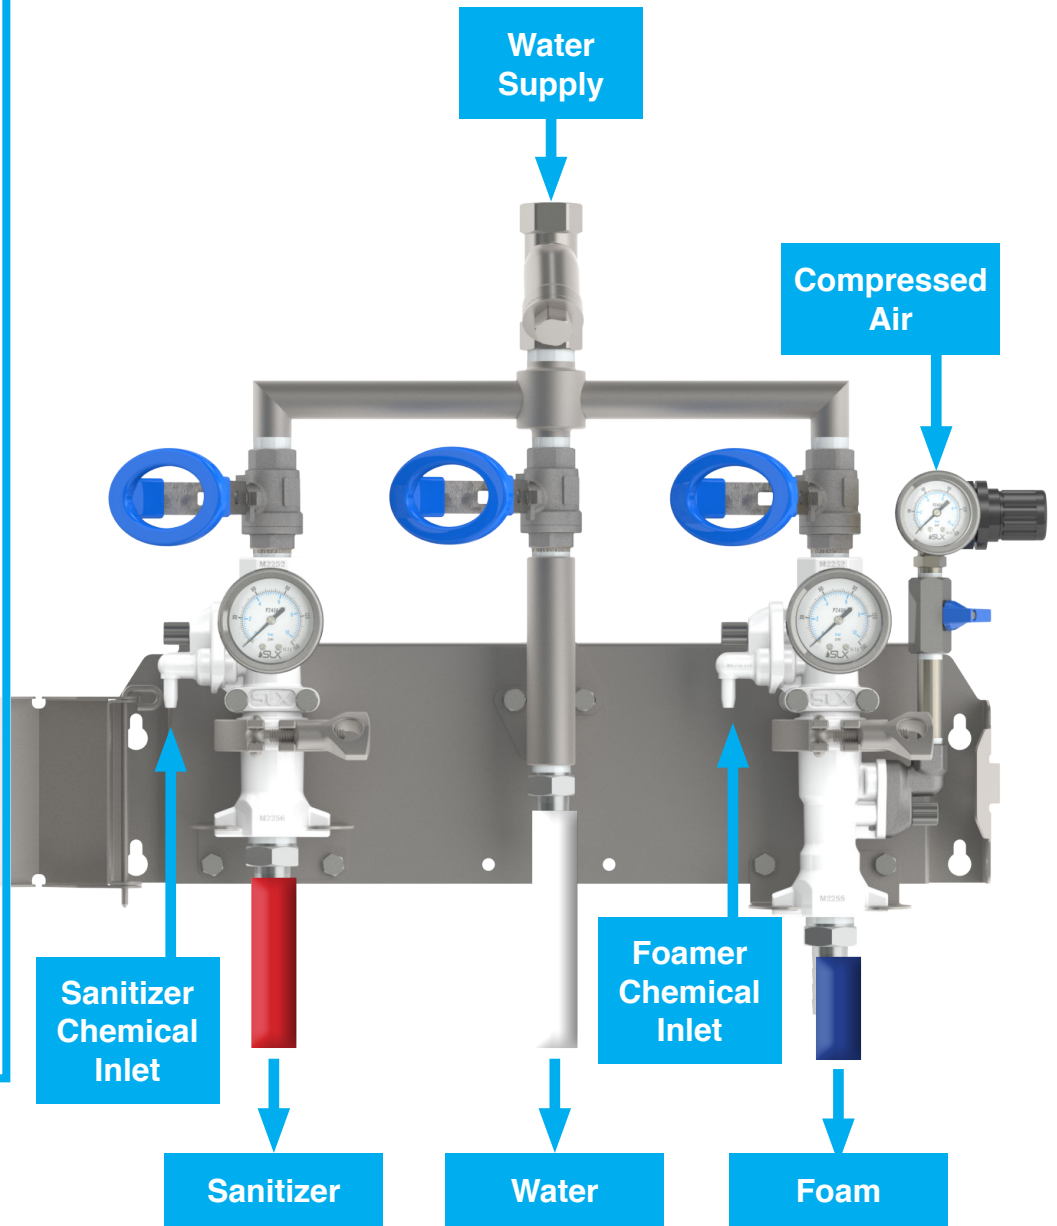

## SPECIFICATIONS

Part #	Foam Coverage Time (sq/ft per min)	Foam Flow Rate (GPM)	Foamer Water Flow Rate (GPM)	Foamer Dilution Ratios	Rinse Flow Rate (GPM)	Sanitizer Flow Rate (GPM)	Sanitizer Water Flow Rate (GPM)	Sanitizer Dilution Ratios
<a href="#">SLX-MS3-VS54P-RN-VF06P</a>	110	3 - 6	0.6	175:1 - 1.5:1	7.2	27 - 54	5.4	1265:1 - 11:1
<a href="#">SLX-MS3-VS54P-RN-VF14P</a>	250	7 - 14	1.4	407:1 - 4:1	7.2	27 - 54	5.4	1265:1 - 11:1
<a href="#">SLX-MS3-VS107P-RN-VF14P</a>	250	7 - 14	1.4	407:1 - 4:1	7.2	53.5 - 107	10.7	11:1 - 14:1
<a href="#">SLX-MS3-VS107P-RN-VF42P</a>	500	21 - 42	4.2	1265:1 - 11:1	7.2	53.5 - 107	10.7	11:1 - 14:1
<a href="#">SLX-MS3-VS54S-RN-VF06S</a>	110	3 - 6	0.6	175:1 - 1.5:1	7.2	27 - 54	5.4	1265:1 - 11:1
<a href="#">SLX-MS3-VS54S-RN-VF14S</a>	250	7 - 14	1.4	407:1 - 4:1	7.2	27 - 54	5.4	1265:1 - 11:1
<a href="#">SLX-MS3-VS107S-RN-VF14S</a>	250	7 - 14	1.4	407:1 - 4:1	7.2	53.5 - 107	10.7	11:1 - 14:1