

SLX-MS



VENTURI SANITIZE & FOAM

The SLX Sanitize & Foam multi-station provides an all in one set up to quickly and effectively foam and sanitize equipment using standard water pressure (35-125 PSI) all from one location using two discharge hoses.

This low to medium volume decentralized cleaning system uses a water driven venturi effect to dilute concentrated chemistry or cleaning solution into the foamer and sanitizer, each individually. Both the foamer and sanitizer are securely mounted onto a stainless-steel wall bracket for easy installation.

Stainless Steel



Polypropylene



FEATURES:


- Split body design for easy servicing and maintenance (patent pending)
- Tool free disassembly (even the check valves and plumbing components)
- Large fan nozzle for efficient spray coverage
- Adjustable consistency (dry vs. wet foam)
- Modular components to alter flow rates
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Includes pressure gauges for air/water
- Large stainless steel ball valves at inlet and outlet with single 3/4" NPT connection for water

Dimensions	15" x 17-3/8" x 6"
Max Temperature	160°F
Water Pressure	35-125 PSI
Air Pressure*	40 PSI (up to 5 CFM)

*Air pressure recommended 40PSI, adjust for foam quality.

INCLUDES:

- Stainless Steel or Polypropylene Venturi Sanitizer with 3/4" x 50' red hose
- Stainless Steel or Polypropylene Venturi Foamer with 3/4" x 50' blue hose
- 10" polypropylene spray wands (2x)
 - Stainless upgrade available
- Stainless steel mounting bracket and cover
- Color coded metering tips (2x sets)
- 6' suction line with mesh screen and ceramic weight (2x)

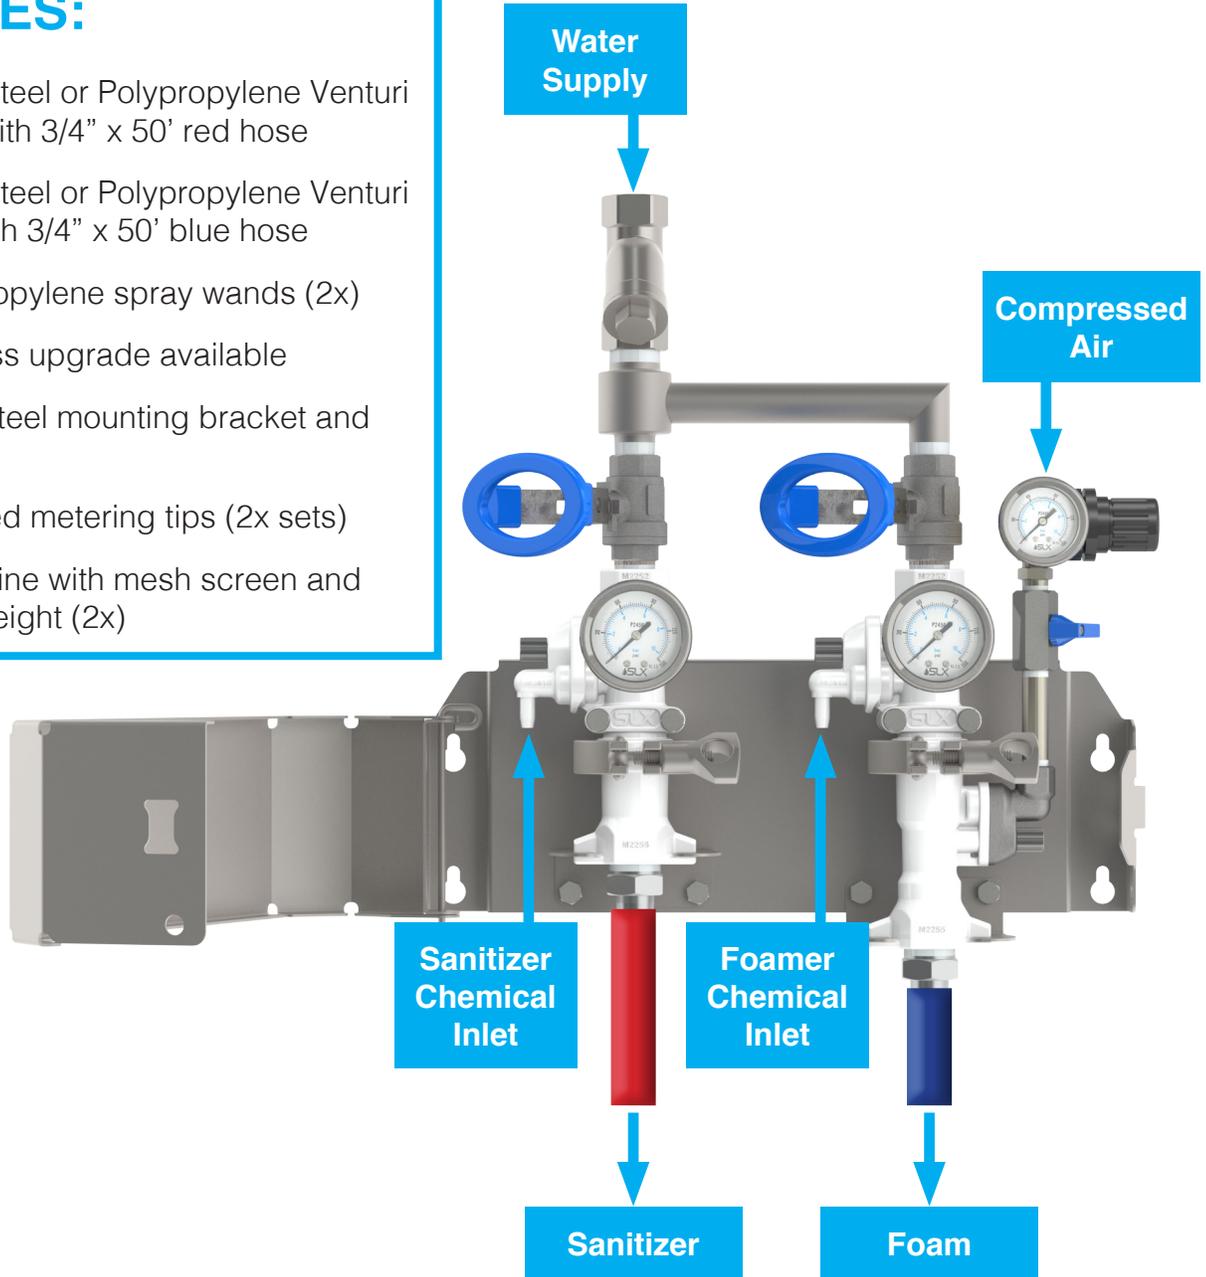

SPECIFICATIONS

Part #	Foam Coverage Time (sq/ft per min)	Foam Flow Rate (GPM)	Foam Water Flow Rate (GPM)	Foamer Dilution Ratios	Sanitizer Flow Rate (GPM)	Sanitizer Water Flow Rate (GPM)	Sanitizer Dilution Ratios
SLX-MS2-VS54P-VF14P	250	7 - 14	1.4	407:1 - 4:1	27 - 54	5.4	11:1 - 14:1
SLX-MS2-VS107P-VF42P	500	21 - 42	4.2	1265:1 - 11:1	53.5 - 107	10.7	3069:1 - 27:1
SLX-MS2-VS107P-VF14P	250	7 - 14	1.4	407:1 - 4:1	53.5 - 107	10.7	3069:1 - 27:1
SLX-MS2-VS54S-VF14S	250	7 - 14	1.4	407:1 - 4:1	27 - 54	5.4	11:1 - 14:1