

SLX-PF



PUMP FED FOAMER

The SLX wall mounted pump fed foamer is the ultimate solution for industrial cleaning applications to quickly and effectively foam equipment, rooms, and other processing areas.

This low to medium volume centralized foaming system works with a variety of pumps to foam pre-diluted chemistries and detergents at a range of flow rates to get you the best foam coverage. Simply hook up compressed air and chemistry to start cleaning!

Stainless Steel




Polypropylene



FEATURES:

- Split body design for easy servicing and maintenance (patent pending)
- Tool free maintenance (even the check valves and plumbing components)
- Large fan nozzle for efficient foam coverage
- Adjustable consistency (dry vs. wet foam)
- Modular components to alter flow rates
- Heavy duty, durable construction
- Lockable stainless-steel cover
- Includes pressure gauge for air
- Large stainless steel ball valves at inlet and outlet with 1/2" NPT connections

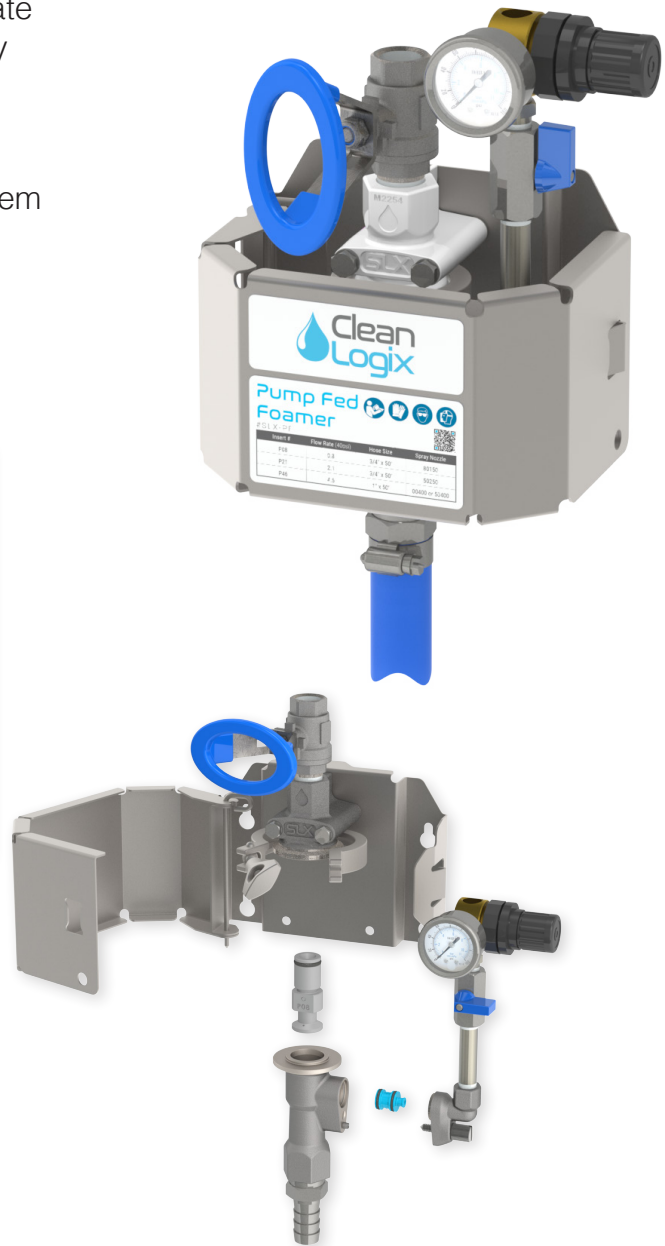


Dimensions	8" x 11-5/8" x 6"
Flow Rate*	0.8 - 4.6 GPM
Max Temperature	160°F
Pump Pressure	35-125 PSI
Air Pressure**	40 PSI (up to 5 CFM**)

*Flow rate and CFM will vary depending on insert size.

**Air pressure recommended 40PSI, adjust for foam quality.

INCLUDES:

- Foamer with polypropylene or stainless steel body
- PVC flow restriction insert (dependent on flow rate)
- Stainless steel mounting bracket and lockable cover
- 50' blue discharge hose
 - Other colors available
- Polypropylene foaming wand
 - Stainless-steel upgrade available

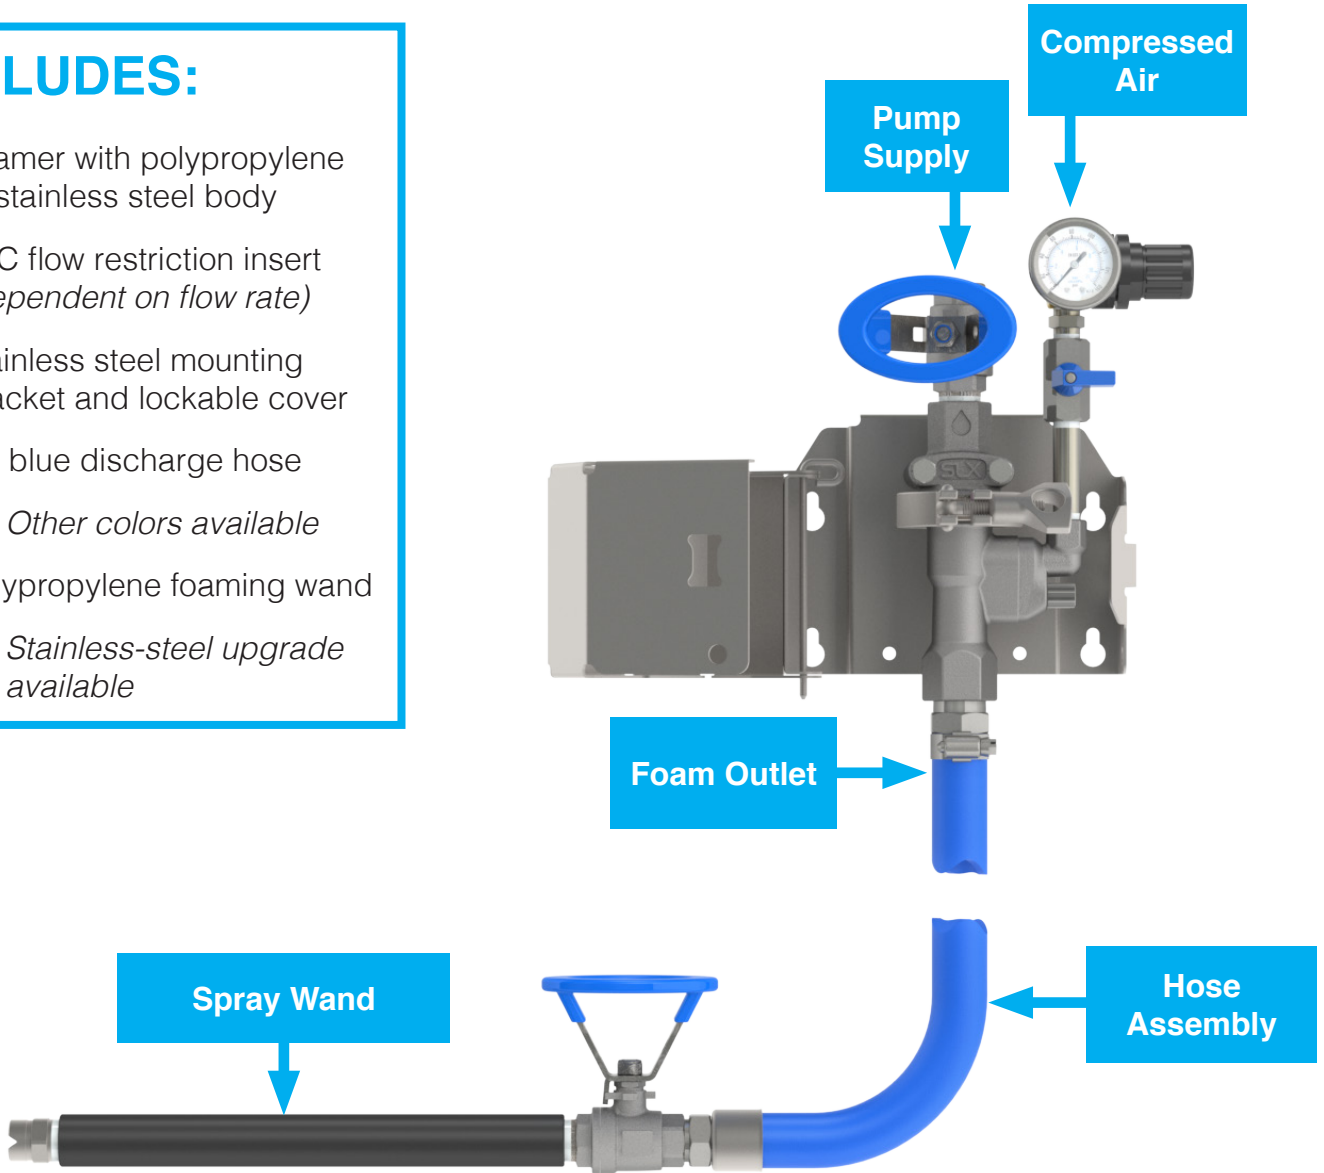

Stainless steel body shown

SPECIFICATIONS

Insert #	Coverage Time (500 sq/ft)	Foam Flow Rate	Water Flow Rate	Hose Size	Spray Nozzle
P08	110	4 - 8	0.8	3/4" x 50'	80150
P21	250	10.5 - 21	2.1	3/4" x 50'	50250
P46	500	23 - 46	4.6	1" x 50'	00400 or 50400

PART NUMBER ARCHITECTURE

SLX-PF [insert size] [body material]

08, 21, 46

S = Stainless Steel
P = Polypropylene

ex) **SLX-PF21S** = Pump Fed Foamer with P21 insert, and stainless steel body.