

# SLX-ES-PF

## ENTRYWAY PUMP FED FOAMER



The SLX-ES-PF is a Satellite entryway foam applicator to add onto existing SLX Entryway Timers. The system is intended for applying foamed cleaning solution or sanitizer to the floor of a door or entryway to help prevent cross contamination. The system works with a variety of pumps to deliver centralized, ready to use (RTU) product to the foamer. Air is injected into the foamer body to produce thick, clinging foam to ensure floor coverage of doorways from 3 foot wide standard doors up to 16 foot wide overhead doors.

The foamer is activated using an existing timer system which can be controlled and modified using a touchscreen interface to adjust interval settings and also enable “boost” functionality to increase the spray frequency for when it matters most. Up to 5 Satellite foamers can be connected to a single SLX-ET Entryway Controller to simultaneously activate 6 systems at once (single zone).

## FEATURES:

- Satellite system for connecting to existing SLX Timer Controllers
- Centralized cleaning using ready to use chemical solutions
- Easy integration
- Stainless steel cover with lockable door
- Adjustable consistency (dry vs. wet foam)
- Split body design for easy servicing and maintenance (patented)
- Tool free maintenance
- Heavy duty, durable construction




Dimensions	10-3/8" x 19-1/4" x 7-3/8"
Flow Rate*	1.4 - 4.6 GPM
Max Temperature	140°F
Pump Pressure	35-125 PSI
Air Pressure	40 PSI (up to 5 CFM)

\*Flow rate will vary depending on insert size.

## INCLUDES:

- Station with polypropylene body
- PVC venturi insert (dependent on flow rate)
- Stainless steel mounting bracket with cover
- Color coded metering tips
- 1/4" OD suction line with strainer and ceramic weight
- 10' blue discharge hose
- Foam spreader nozzle for floor application

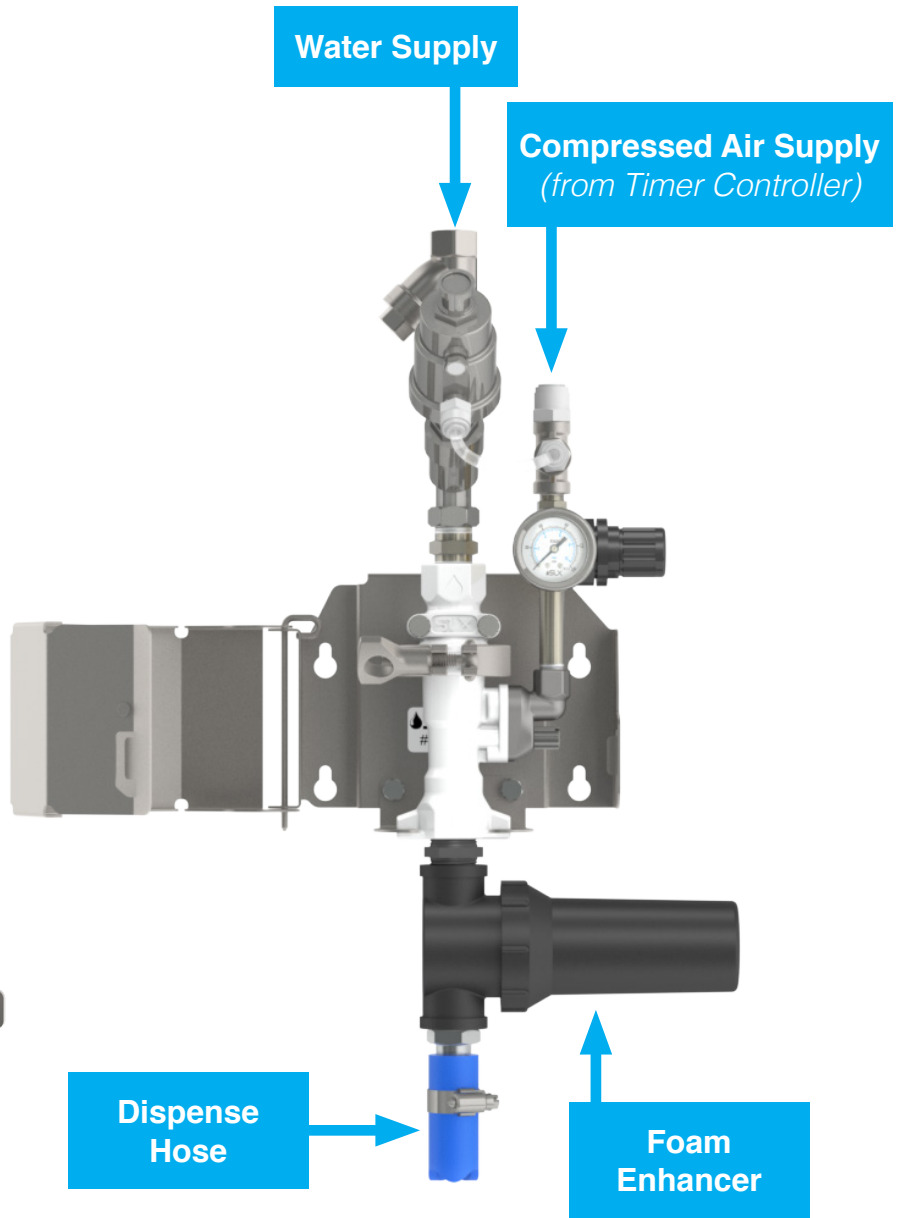

## SPECIFICATIONS

Insert #	Water Flow Rate (@40 PSI)	Hose Size	Foam Floor Coverage
P14	1.4 GPM	3/4" x 10'	3 ft. x 4 ft.
P21	2.1 GPM	3/4" x 10'	6 ft. x 6 ft.
P46	4.6 GPM	1" x 10'	8-16 ft. x 8 ft.

## PART NUMBER ARCHITECTURE

**SLX-ES-PF** [insert size] [body material]  
 14, 21, 46      P = Polypropylene

ex) **SLX-ES-PF14P** = Pump Fed Entryway Foamer Satellite with 1.4 GPM flow rate for covering a 3ft x 3ft. floor area.