

SLX-ES-VF

ENTRYWAY VENTURI FOAMER



The SLX-ES-VF is a Satellite entryway foam applicator to add onto existing SLX Entryway Timers. The system is intended for applying foamed cleaning solution or sanitizer to the floor of a door or entryway to help prevent cross contamination. The system features a built-in venturi injector that works with standard, city water pressure (35-125 PSI) to dilute concentrated chemistry, in line, to create an accurately measured cleaning solution. Air is injected after the venturi to produce thick, clinging foam to ensure floor coverage of doorways from 3 foot wide standard doors up to 16 foot wide overhead doors.

The foamer is activated using a timer system which can be controlled and modified using a touchscreen interface to adjust timer settings and also enable “boost” functionality to increase the spray frequency for when it matters most. Up to 5 Satellite foamers can be connected to a single SLX-ET Entryway Controller to simultaneously activate 6 systems at once (single zone).

FEATURES:

- Satellite system for connecting to existing SLX Timer Controllers
- Decentralized cleaning with built-in venturi injector
- Easy integration
- Stainless steel cover with lockable door
- Adjustable consistency (dry vs. wet foam)
- Split body design for easy servicing and maintenance (patented)
- Tool free maintenance
- Heavy duty, durable construction





Dimensions	8-3/4" x 20-5/8" x 8-3/8"
Flow Rate*	1.4 - 4.2 GPM
Max Temperature	140°F
Water Pressure	35-125 PSI
Air Pressure	40 PSI (up to 5 CFM)

*Flow rate will vary depending on insert size.

INCLUDES:

- Station with polypropylene body
- PVC venturi insert (dependent on flow rate)
- Stainless steel mounting bracket
- Color coded metering tips
- 1/4" OD suction line with strainer and ceramic weight
- 10' blue discharge hose
- Foam spreader nozzle for floor application

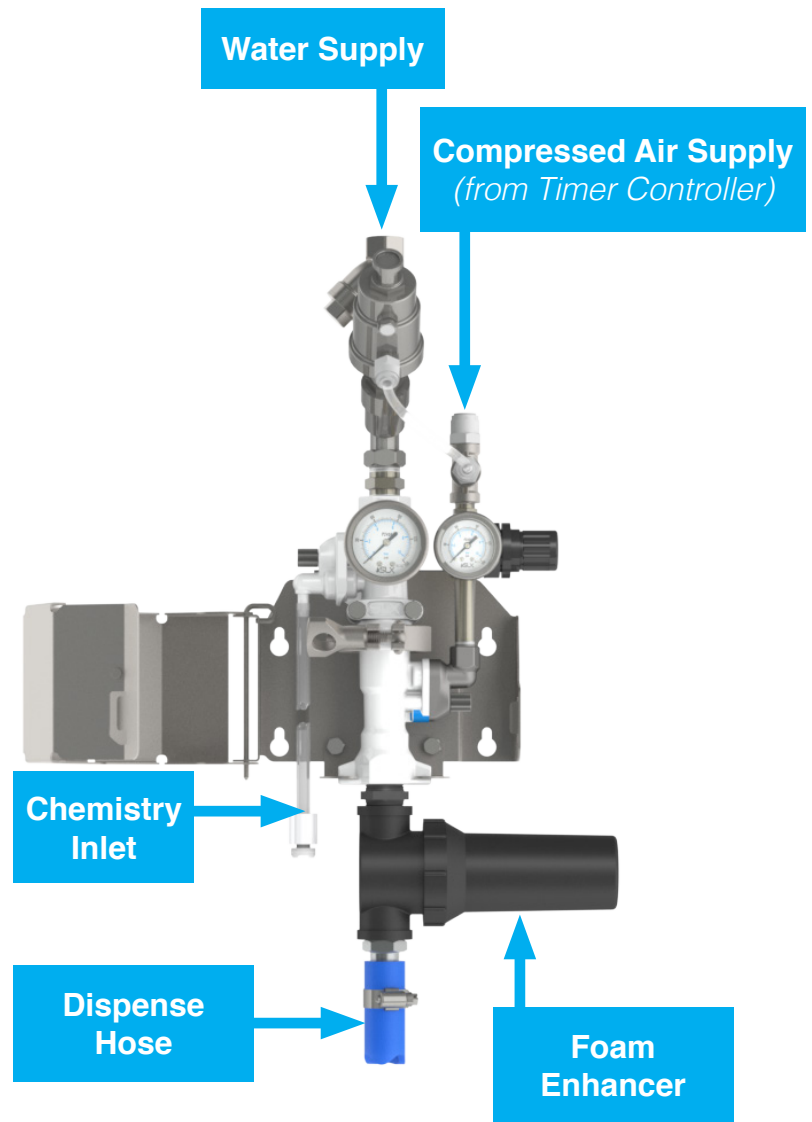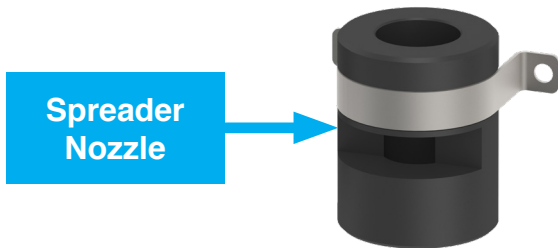

SPECIFICATIONS

Insert #	Water Flow Rate (@40 PSI)	Hose Size	Foam Floor Coverage
V14	1.4 GPM	3/4" x 10'	3 ft. x 4 ft.
V25	2.5 GPM	3/4" x 10'	6 ft. x 6 ft.
V42	4.2 GPM	1" x 10'	8-16 ft. x 8 ft.

PART NUMBER ARCHITECTURE

SLX-ES-VF [insert size] [body material]
 14, 25, 42 P = Polypropylene

ex) **SLX-ES-VF14P** = Venturi Entryway Foamer Satellite with 1.4 GPM flow rate for covering a 3ft x 3ft. floor area.